
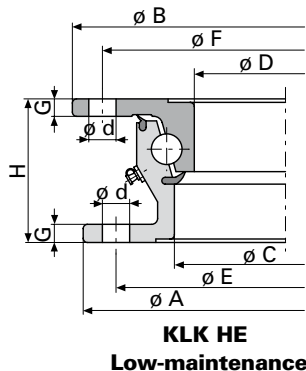



Ball bearing turntables · KLK HE and SO

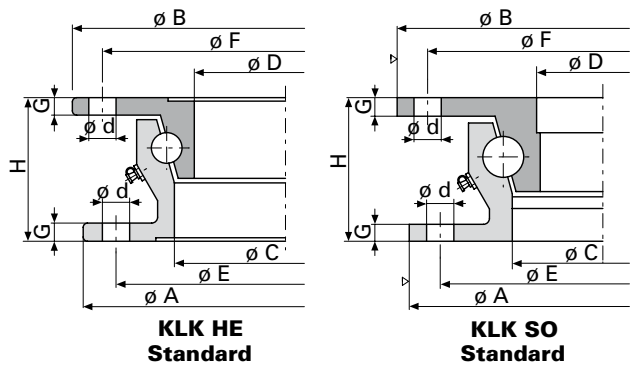

▽ = Shaped profile

Specification

- E-coating
- Standard/Low-maintenance (HE series)
- Drilled/Undrilled
- Special drill templates available upon request
- Lubricant dispenser (optional)
- Splined bolts (optional)

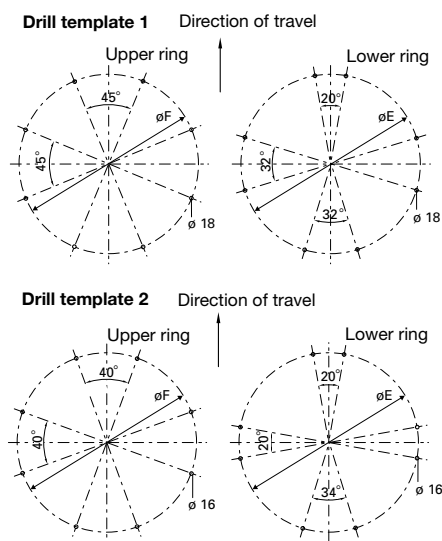

Selection table / Versions available

Order No.	Permitted axial load (kN)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	d (mm)	G (mm)	H (mm)	Weight (approx. kg)	WA	Drill template No
KLK HE 4	30	685	700	590	573	657	671		9	80	32.0	Standard	Undrilled
KLK HE 5	50	880	895	785	768	852	866	16	9	80	43.0	Standard	2
KLK HE 6-1000	60	1000	1015	905	888	972	986		9	80	48.0	Standard	Undrilled
KLK HE 6	65	1090	1105	995	978	1060	1074	18	9	80	52.0	Standard	1
KLK HE 12-1000	70	1000	1011	886	859	960	974		10	90	63.0	Standard	Undrilled
KLK HE 12-1000 W	70	1000	1011	882	850	960	974		10	90	65.0	Low-mainte.	Undrilled
KLK HE 12	80	1100	1111	986	959	1060	1074	18	10	90	69.0	Standard	1
KLK HE 12 W	80	1100	1111	982	950	1060	1074	18	10	90	72.0	Low-mainte.	1
KLK HE 18-1000	80	1000	1011	886	859	960	974		10	90	63.0	Standard	Undrilled
KLK HE 18-1000 W	80	1000	1011	882	850	960	974		10	90	65.0	Low-mainte.	Undrilled
KLK HE 18	100	1100	1111	986	959	1060	1074	18	10	90	69.0	Standard	1
KLK HE 18 W	100	1100	1111	982	950	1060	1074	18	10	90	72.0	warungsarm	1
KLK HE 1000-22	100	1000	1011	886	859	960	974		10	90	63.0	Standard	Undrilled
KLK HE 1000-22 W	100	1000	1011	882	850	960	974		10	90	65.0	Low-mainte.	Undrilled
KLK HE 1100-22	120	1100	1111	986	959	1060	1074	18	10	90	69.0	Standard	1
KLK HE 1100-22 W	120	1100	1111	982	950	1060	1074	18	10	90	72.0	Low-mainte.	1
KLK SO 1000-24	120	987	1000	873	842	952	966		10	90	68.0	Standard	Undrilled
KLK HE 1200-22	130	1200	1211	1086	1059	1160	1174	18	10	90	76.0	Standard	1
KLK HE 1200-22 W	130	1200	1211	1082	1050	1160	1174	18	10	90	80.0	Low-mainte.	1
KLK HE 1300-22	140	1300	1311	1186	1159	1260	1274		10	90	84.0	Standard	Undrilled
KLK HE 1300-22 W	140	1300	1311	1182	1150	1260	1274		10	90	89.0	Low-mainte.	Undrilled
KLK SO 1100-24	160	1095	1108	982	950	1060	1074	18	10	90	75.0	Standard	1
KLK SO 1200-24	180	1195	1208	1082	1050	1160	1174		10	90	83.0	Standard	Undrilled

Explanations:

WA/Maintenance